

# PM660

50 kVA ~ 800 kVA  
PF 0.9



## Highlights

Power flexibility from 50 kVA – 800 kVA

Modular hot-swappable & Scalability

High MTBF and low MTTR

High efficiency


High adaptability

EA660 modular UPS is ideal for reliable, saving, intelligent and easy solutions. It ensures that a scalable, secure, high quality power supply is available for any critical high – density computer and IT environment applications, such as data centers and other critical loads.


EA660 modular UPS is a scalable three–phase / three–phase uninterruptible power supply system with DSP technology and provides true on – line double conversion power protection. The available UPS power and redundancy level can expand vertically from 50 to 800 kVA / 720 kW in one single power cabinet, and four power cabinets can be connected in parallel, increasing the capacity up to 3.2 M kVA. It features modular hot–swappable design, all modules support “plug & play” , including power modules, bypass module, and control module, simplifies UPS servicing and maintenance.

## Features

- DSP digital control technology
- Pure sine wave double conversion, with strong load capacity
- Flexible modularity and easy scalability with all hot–swappable module design
- High efficiency at low load rate: 96% at 40% rated load and 95% at 20% rated load
- High power density of 50 kVA / 3U power module
- High grid adaptability, strong load adaptability and strong overload capability
- Small footprint (500 kVA system only 1.02 m<sup>2</sup> footprint)
- Inbuilt integrated PDU system, easy installation and saving investment
- Input power factor > 0.99, THDi < 3%, environment friendly and high – efficiency and energy – saving
- Wide input voltage range, 50 Hz / 60 Hz frequency auto–sense, adapt to all kinds of grid
- Soft–start technology improves generator matching up to 1:1.1
- Support two modes of frequency conversion: 50 Hz input / 60 Hz output and 60 Hz input / 50 Hz output
- Intelligent hibernation design enables UPS to operate efficiently at low load rate
- Advanced parallel expansion technology, support 4 units in parallel
- Share battery pack in parallel operation, saving user's battery cost
- Flexible charger parameter and battery configuration setting, numbers of battery 30 ~ 46 pcs selectable
- Intelligent battery management (Intelligent charge/discharge management and float charging voltage temperature compensation), extending battery lifespan
- Support battery cold start and utility self boot
- Self–aging function, easy debugging and test on site
- Fault–tolerant design for fan system: 30% load can be driven when 2 fans fail and 50% load when 1 fan fails
- Front accessible maintenance, top/bottom cable entry compatible
- Complete hardware and software protection function, robust self – diagnostic function, and abundant event log for check
- 7 inches LCD touch screen, friendly human – machine interface
- Monitoring unit with built–in SNMP, supports RS485 and dry contacts

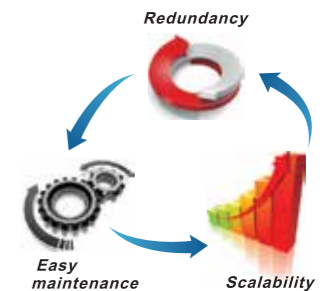

# PM 660 (50 - 800 KVA) MODULAR

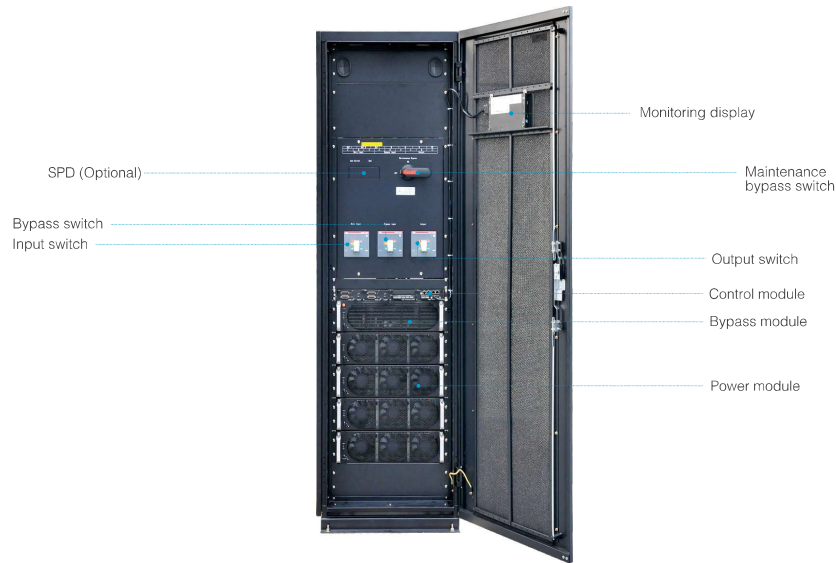

Power Module



Bypass Module



Control Module



## Specifications

MODEL	GT200	GT300	GT400	GT500	GT600	GT800
Rated capacity	200 kVA	300 kVA	400 kVA	500 kVA	600 kVA	800 kVA
Numbers of power modules	4	6	8	10	12	16
Rated capacity of power module	50 kVA					
<b>INPUT</b>						
Input wiring	3 Ph + N + PE					
Rated voltage	380 / 400 / 415 Vac					
Voltage range	138 ~ 485 Vac (305 ~ 485 Vac without power downgrading; 138 ~ 305 Vac with linear downgrading 40%)					
Input frequency	40 ~ 70 Hz					
Power factor	≥ 0.99					
Current distortion	< 3%					
<b>BATTERIES</b>						
Battery voltage	± 240 Vdc ( ± 180, ± 192, ± 204, ± 216, ± 228, ± 252, ± 264, ± 276 selectable)					
Number of battery	40 pcs 12 V batteries ( 30 / 32 / 34 / 36 / 38 / 42 / 44 / 46 pcs selectable)					
<b>OUTPUT</b>						
Output wiring	3 Ph + N + PE					
Rated voltage	380 / 400 / 415 Vac ± 1%					
Frequency	Synchronized with utility in mains power mode: 50 Hz / 60 Hz ± 0.25% in battery mode:					
Power factor	1					
Voltage distortion	≤ 1% with liner load / ≤ 3% with non-linear load					
Crest factor	3:1					
Inverter overload capacity	105% < load ≤ 110%: transfer to bypass in 60 min 110% < load ≤ 125%: transfer to bypass in 10 min 125% < load ≤ 150%: transfer to bypass in 1 min Load > 150%: transfer to bypass in 200 ms					
Bypass overload capacity	Load ≤ 135% for long term; < 100% load for 100 ms					
<b>SYSTEM</b>						
Efficiency	96%					
Max. number of parallel	4 units					
Transfer time	0 ms					
Protection	Short circuit protection, overload protection, over-temperature protection, battery low voltage protection, output over/low voltage protection, fans failure protection etc.					
Communications	RS485, dry contacts, SNMP					
Display	7 inches LCD touch screen					
<b>OTHERS</b>						
Operating temperature	0 ~ 40°C					
Storage temperature	- 40°C ~ 70°C					
Humidity	0 ~ 95% (non-condensing)					
Altitude	≤ 1000 m. Above 1000 m, derating 1% for each additional 100 m					
Protection level	IP 20					
Noise level at 1 m	< 65 dB		< 68 dB			
Cabinet dimensions (W x D x H) (mm)	600 x 850 x 2000		1200 x 850 x 2000		1400 x 850 x 2000   2400 x 850 x 2000	
UPS module dimensions (W x D x H) (mm)	442 x 620 x 130					
Cabinet weight (kg)	233		415		465   617   1025	
UPS module weight (kg)	32.5					

● All specifications subject to change without notice.